


## 7G29SS2AB-B

### Hartland G2 | HARTLAND G2 RANGE | Power Sockets

#### Item Image




#### Wiring

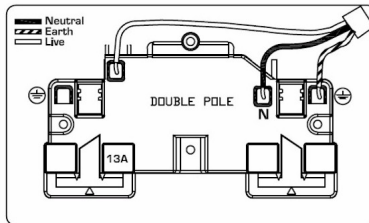

#### Dimensions

**Hamilton®**  
HARTLAND G2  
SS2  
Switched Socket

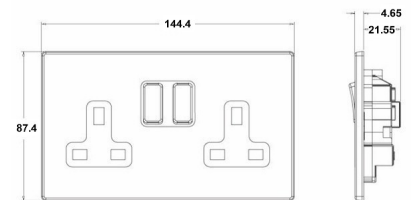

|                               |  |
|-------------------------------|--|
| Primary Range                 | Hartland G2  |
| Insert Type                   | 2 gang 13A Double Pole Switched Socket                 |
| Insert Colour                 | Antique Brass/Black                                    |
| EAN13 Barcode                 | 5051164003326  |
| Commodity Code                | 85363010   |
| Luckins TSI                   | 407517329  |
| Dimensions(Nominal)           | Double: Height = 87.4mm Width = 144.4mm Depth = 4.65mm |
| Weight                        | 265 GR   |
| Switched Poles                | Double   |
| Current Rating                | 13 Amp   |
| Voltage                       | 220/250V AC  |
| Maximum Load                  | 13 Amp   |
| Mains Frequency               | 50Hz   |
| IP Rating                     | IP2XD  |
| Contact Gap Minimum           | 3mm  |
| Terminal Capacity 1           | 4x2.5mm <sup>2</sup>                                   |
| Terminal Capacity 2           | 3x4mm <sup>2</sup>                                     |
| Terminal Capacity 3           | 2x6mm <sup>2</sup> Multi-Strand                        |
| Terminal Capacity 4           | 1x10mm <sup>2</sup>                                    |
| Earth Terminal Capacity 1     | 4x2.5mm <sup>2</sup>                                   |
| Earth Terminal Capacity 2     | 3x4mm <sup>2</sup>                                     |
| Earth Terminal Capacity 3     | 2x6mm <sup>2</sup> Multi-Strand                        |
| Earth Terminal Capacity 4     | 1x10mm <sup>2</sup>                                    |
| Product Class 1               | Must be earthed  |
| Ambient Operating Temperature | -5° to +40°C   |
| Recommended Location          | Internal Use Only                                      |
| Maximum Installation Altitude | 2000m  |
| Standard/Approval             | BS 1363-2  |
| Additional Notes              | Dual Earth: Yes  |

## 7G29SS2AB-B

### Hartland G2 | HARTLAND G2 RANGE | Power Sockets

|   |  |  |
|---|--|--|
| <p>All products listed conform to current British or European standard and the product information is correct at the time of going to press.</p>  | <p>All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.</p>         | <p>It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.</p> |
| <p>Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.</p>   | <p>Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.</p> | <p>Correct as at 03 May 2022 02:26 PM<br/>E&amp;OE</p>   |
| <p>R Hamilton &amp; Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ<br/>T: +44 (0)1747 860088<br/>E: info@hamilton-litestat.com www.hamilton-litestat.com<br/>Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB<br/>Registered in London No. 941624 VAT Registration No. 222 6607 84</p> |  |   |
| <p>7G29SS2AB-B - Hartland G2 Antique Brass 2 gang 13A Double Pole Switched Socket Antique Brass/Black</p>   |  |  |